

(19) World Intellectual Property
Organization
International Bureau



PCT/PTO 22 MAR 2005



(43) International Publication Date
8 April 2004 (08.04.2004)

PCT

(10) International Publication Number
WO 2004/028717 A1

- (51) International Patent Classification⁷: B09C 1/08, C09K 17/00
- (21) International Application Number: PCT/GB2003/004181
- (22) International Filing Date: 26 September 2003 (26.09.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 0222393.1 26 September 2002 (26.09.2002) GB
- (71) Applicants (for all designated States except US): UNIVERSITY OF BRIGHTON [GB/GB]; Mithras House, Lewes Road, Brighton, Sussex BN2 4AT (GB). UNIVERSITY OF SUSSEX [GB/GB]; Falmer, Brighton, Sussex BN1 9QJ (GB).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): CUNDY, Andrew, Brian [GB/GB]; 5 Thurlow Road, Worthing, Sussex BN11 2JB (GB). HOPKINSON, Laurence, James [GB/GB]; 22 Station Road, Sholing, Southampton, Hampshire SO19 8HH (GB).
- (74) Agents: GAUNT, Robert, John et al.; Stevens Hewlett & Perkins, Halton House, 20/23 Holborn, London, Greater London EC1N 2JD (GB).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Declaration under Rule 4.17:
— of inventorship (Rule 4.17(iv)) for US only
- Published:
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD FOR SOIL REMEDIATION AND ENGINEERING

(57) Abstract: An electrokinetic method for groundwater protection, soil remediation and engineering which comprises applying an electric field across an area of soil, sediment or slurry so as to generate a pH and Eh gradient and thereby promote the in situ precipitation of a stable iron-rich band. The method may be performed for the purpose of stabilisation and/or strategic dewatering/rewatering of soils, sediment and/or slurries, the improvement of the physical properties of soils and sediments for engineering purposes, the forced and directed migration of contaminated leachates, and/or electro-osmotic purging of non-polar contaminants.

WO 2004/028717 A1

6/PRTS.

10/528629

-JC05 Rec'd PCT/PTO 22 MAR 2005

METHOD FOR SOIL REMEDIATION AND ENGINEERING



This invention relates to an electrokinetic method for groundwater protection, soil remediation and engineering, and, more particularly, to such a method which involves the strategic electrokinetic placing of an iron-rich barrier in soils, sediments and slurries.

Contaminated soils and groundwater at industrial, waste disposal and spill sites are serious environmental problems. Although clays and silts tend to sequester large quantities of heavy metals, radionuclides, and selected organic pollutants (Kovalick 1995), they are relatively resistant to remediation with traditional technologies (e.g. pump and treat, soil washing) because of their low hydraulic conductivities. This has stimulated a considerable amount of research into cost-effective, in situ techniques that can be used to remediate low-permeability, high clay content soils. One emerging technology that has received much attention is electrokinetic remediation. Electrokinetics is a process that separates and extracts heavy metals, radionuclides, and organic, inorganic, BTEX and radioactive contaminants from saturated or unsaturated clay-rich soils, sludges and sediments under the influence of an applied electrical field. Experiments have shown its applicability to a variety of organic, inorganic and radioactive wastes (Acar *et al.*, 1993; Kovalick 1995; Virkutyte *et al.*, 2002).

The electrokinetic process involves the application of a low intensity direct current (DC) across electrode pairs that have been implanted in the ground on each side of the contaminated soil mass. When DC electric fields are applied to contaminated soil via electrodes placed into the ground, migration of charged ions occurs. Positive ions move towards the negatively charged cathode, while negative ions are attracted to the positively charged anode. It has been shown that non-ionic species are transported along with the electro-osmotically-induced water flow. Electrokinetic remediation is possible in both saturated and unsaturated

soils.

The dominant and most important electron transfer reaction that occurs at the electrodes during the electrokinetic process is the electrolysis of water. Groundwater is dissociated at the electrodes via the reactions:-



- 10 This produces an acid front (due to excess H^+ ions) around the anode and an alkaline front (due to excess OH^- ions) at the cathode.

The electric current causes electro-osmosis and ion migration, which moves both water and the aqueous phase contaminants in the subsurface from one electrode to the other. It also causes

15 electrophoresis, which results in the migration of colloidal fractions. Sorption, precipitation and dissolution are accompanying reactions. Contaminants in the aqueous phase, and contaminants desorbed from soil particles, are transported towards the anode or cathode depending on their charge. In existing commercial electrokinetic systems, contaminants are

20 commonly extracted by a secondary recovery system or deposited at the electrode. Recovery methods for contaminants that have migrated to the electrodes include electroplating, precipitation/co-precipitation, pumping near the electrode, or complexing with ion exchange resins. Surfactants, complexing agents and other reagents are frequently used to assist

25 contaminant movement (Acar *et al.*, 1993; Virkutyte *et al.*, 2002). However, most contaminated sites contain mixtures of wastes rather than single contaminants and which makes remediation more complicated.

At present there is no standardised universal soil/sediment remediation approach. Instead there are a numbers of technologies (e.g.

30 LasagnaTM, Electro-KleanTM, electrochemical geooxidation), each of which has its own operational and design requirements, and limitations (Virkutyte

et al., 2002). Many of these technologies are technically complex and energy intensive, and geared toward the removal of 90% or more of specific contaminants, under very specific field or laboratory-based conditions. However, in the real environment a low-tech, low-energy
5 contaminant reduction/containment technique may be more appropriate and realistic.

Electrodes that are inert to anodic dissolution are conventionally used in electrokinetic soil remediation. These include graphite, platinum, gold and silver electrodes, although less expensive
10 electrodes made from titanium, stainless steel and plastic have also been employed. Metals such as lead, chromium, cadmium, copper, uranium, mercury and zinc, as well as polychlorinated biphenyls, phenols, chlorophenols, toluene, trichloroethane and acetic acid are suitable for electrokinetic remediation and recovery.

15 The main parameters that influence the overall process are soil properties, depth and type of contamination, cost of accommodating electrodes and placing treatment zones, clean up time, and cost of labour (Virkutyte *et al.*, 2002). Factors that influence the cost of the electrokinetic remediation process are soil characteristics and moisture, contaminant
20 concentrations, concentration of non target ions and conductivity of pore water, depth of the remediated soil, site preparation requirements, and electricity costs (van Cauwenberghe 1997). The cost optimised distance between electrodes for commercial systems is 3 to 6m for most soils (Lagerman 1993; Ho *et al.*, 1999). Given that the migration rate of
25 contaminants is approximately 2 to 3cm/day, the time frame for successful remediation between electrodes spaced at 2 to 3m is of the order of 100 days, although cation-selective membranes and other technologies are commonly employed to reduce remediation periods to 10 to 20 days (van Cauwenberghe 1997). The breakdown of costs associated with an
30 electrokinetic remediation programme are approximately 40% for electrode construction, 10 to 15% for electricity, 17% for labour, 17% for materials,

and up to 16% for licenses and other fixed costs (Ho *et al.*, 1997).

It is an object of the present invention to provide an improved electrokinetic method for groundwater protection, soil remediation and engineering which is low cost, efficient and flexible in its application. The method involves:-

- the strategic and remote electrokinetic placement of an iron-rich barrier to a required geometry, which provides a physical and/or chemical barrier to contaminants, and improves the engineering properties of soils and sediments (contaminated or otherwise);
- the generation of a pH /Eh gradient to remobilise and/or trap contaminants within soils, sediments and slurries; and
- the stabilisation and strategic dewatering/rewatering of soils/sediments/slurries, the forced and directed migration of contaminated leachates, and the electro-osmotic purging of non-polar contaminants.

Unlike existing electrokinetic techniques, the method of the present invention provides a robust, non-selective and low energy approach to contaminant reduction and containment, and is based on natural iron mineralization processes that occur in the near-surface environment. In addition, since the system mimics nature (e.g. the formation of iron pans), and iron is a common major element in rock and soil systems and is relatively non-toxic, the environmental impacts are minimal. Moreover, iron itself has well-documented contaminant-trapping properties.

According to the present invention there is provided an electrokinetic method for groundwater protection, soil remediation and engineering which comprises applying an electric field across an area of soil, sediment or slurry so as to generate a pH and Eh gradient and thereby promote the *in situ* precipitation of a stable iron-rich band.

The method of this invention is characterised by increasing the mobility and solubility of contaminants through the application of an

electric charge, and simultaneously arresting their migration either by fixation to an electrochemically-generated iron band which is precipitated within the area under treatment, or via forced precipitation within the imposed Eh/pH field. This approach is distinct from other remediation techniques because it is geared towards deliberately producing an iron band *in situ* between the cathode and the anode, which simultaneously provides a physical as well as a chemical barrier; employs a low voltage of typically less than 0.5 volts per cm distance between electrodes (with low energy requirements) to generate a strong Eh/pH gradient within soils and sediments; uses low cost, sacrificial cathode and anode materials; can produce, through differential dewatering, controlled differential subsidence and permeability reduction; and which can be generated in natural and industrial materials over laboratory timescales. In contrast, current commercial techniques have an order of magnitude higher energy requirements, actively avoid generation of a pH gradient and precipitation of iron or contaminants within the soil or sediment (e.g. current electrokinetic techniques); or use *ex situ* clean-up/disposal; or hard engineering technologies (e.g. permeable reactive barriers).

The present invention is a low voltage ($< 0.5\text{V/cm}$, in most cases less than 0.2V/cm) electro-chemical based technique, which uses electrokinetics to generate an intense pH gradient (typically from pH 2 – pH 13) and Eh gradient in soils, sediments and sludges, destabilise/dissolve minerals and force the *in situ* precipitation of a stable iron-rich band. Internal electric fields of the scale used in the method of this invention commonly occur naturally in rock and soil bodies and can arise from a variety of conditions. A common result of this phenomenon is the electrical generation of bands of iron-stone in uncemented sediments.(e.g. Jacob *et al.*, 1996). Such bands, which are found in many geological systems, can result when the electrolytic dissociation of water takes place, with the formation of an anode zone characterised by acidic ions (pH 2.0 – 2.5), and a cathode zone characterised by alkaline ions

(pH 10.5 – 11.5). As a consequence of the potential difference, a sharp boundary zone is developed within which an abrupt pH change from 2.5 to 8 occurs. Where sufficient iron is present in the system, spontaneous precipitation of insoluble metal (mainly iron) hydroxides and oxides occurs at the point of this pH “jump” (Jacob *et al.*, 1996). Small amounts of native (i.e. zero-valent) iron can also be present. In natural settings, such ferric iron-rich bands are commonly poorly crystalline or amorphous (e.g. Hopkinson *et al.*, 1998).

The method of the present invention thus emulates these natural iron^{III} mineralisation processes, but over experimental rather than geological timescales, by applying a direct electric potential to electrodes to grow bands of iron^{III} mineral phases in sediment and soil columns, and to harness their adsorptive properties, to trap or break down contaminants from the aqueous phase, or extracted from soil particles, during their migration in the applied electrokinetic field. Freshly precipitated amorphous or poorly crystalline Fe-rich solids, of the type generated by this method, are extremely effective scavengers of a range of heavy metals, radionuclides and organic pollutants in a variety of environments (Bendell-Young and Harvey 1992, Cundy and Croudace 1995). Zero valent iron is itself an important catalyst for the dechlorination of toxic chlorinated aliphatic compounds (Haran *et al.*, 1996). Moreover, because this method generates strongly acidic conditions at the anode and strongly alkaline conditions at the cathode, contaminants attached to soil or sediment particles (such as radionuclides and heavy metals), which are soluble under either acidic or basic conditions are solubilised and forced to migrate towards the appropriate electrode, whence they precipitate or are co-precipitated with the iron-band. In essence, the present invention provides the opportunity to “flush” contaminants from parcels of contaminated sediments, and then retrap and concentrate them in, or adjacent to, the iron-band. This offers the potential of *in situ* clean-up of contaminated soils, sediments and sludges. Clean-up of the whole soil volume between

the electrodes can be achieved, and plating of contaminants onto the cathode avoided, by simply reversing the polarity of the electrodes at regular intervals.

The approach embodied in the method of this invention is
5 distinct from existing *in situ* remediation technologies, such as permeable reactive barriers, in that rather than merely sequestering contaminants from solution, the system actually mobilises contaminants into solution prior to their subsequent trapping by the reactive band / imposed Eh/pH gradient, thus cleaning contaminated soils as well as ground waters. It differs from
10 existing electrokinetic techniques in its use of low-cost electrodes (for example, electrodes made of cast iron, scrap iron, stainless steel or other iron-rich material), its low energy requirements and most significantly in its deliberate generation of a sorptive iron-band in the material being treated. Hence, the electrokinetic technique described here is innovative and clearly
15 distinguished from other electrokinetic treatment systems. The precipitated iron band, however, represents much more than merely a chemical sink for toxic contaminants liberated from the sediment column via oxidation-reduction and pH reactions. The electrokinetic process that triggers iron band formation may also be used to improve the engineering properties,
20 and massively reduce the permeability, of soils and sediments through differential dewatering of clays, and iron-band generation. Hence, electrokinetic ferric iron precipitation represents a means of physically confining waste spills, providing a reactive barrier to liquid waste spillages that can be re-sealed and strengthened by periodic applications of
25 electrical current (for instance in physically trapping and sorbing leachate that has percolated through the base liner of a landfill). In addition, the method offers the potential, through strategic dewatering or rewatering of soils and sediments and iron-band generation, to rewater and stabilise soils for civil engineering applications (e.g. in building works). Existing
30 dewatering techniques involve complete dewatering of large-volume slurries (e.g. Lamont-Black 2001), whereas the present technique is

applied *in situ* to strategically rewater or dewater, and strengthen or generally improve the engineering properties of, parcels of soil, and so has a range of potential civil engineering applications (such as dealing with subsidence).

5 The method of this invention may have direct applicability in relation to the integrity of land fill liners, permeable reactive barrier technologies, and funnel and gate systems, controlled differential subsidence, improving the engineering properties of soils and sediments, remediation of contaminated land (soils and sediments) and clean up of
10 contaminated industrial sludges and slurries. Consequently, it will be of significant interest and potential benefit to a wide range of organisations, for example environment agencies, water companies, land fill operators, civil engineering and environmental consultants and nuclear fuel companies.

15 The method of the present invention therefore has a number of surprising and significant benefits compared to other commercial techniques. In comparison with permeable reactive barrier technologies, it provides a resealable iron-rich barrier, which can be remotely placed (without engineering) at working sites and sites with infrastructure to
20 physically and chemically inhibit subsurface pollutant migration, and can redirect subsurface pollutant flow. In comparison with commercial electrokinetic remediation techniques it has an order of magnitude lower energy requirements and electrode cost, does not involve the use of potentially toxic conditioning solutions, can remobilise contaminants from
25 the solid phase and simultaneously trap and contain contaminants in the liquid phase, and can be applied on working sites, or sites containing infrastructure.

 The low voltage used, coupled with the flexibility provided by the use of multiple, low cost electrodes, means that contaminated land can
30 be sequentially treated with a series of electrode arrays, whereby the distance between individual electrodes does not exceed a few metres. In

addition, the current is sufficiently low to avoid soil heating and large-scale gas generation at the electrodes. Adjustable electrode geometry means that the technique can be adapted to suit site-specific conditions, and large areas of land can be sequentially treated. It will be appreciated that the iron may be precipitated to form an impermeable coherent band, or a coating which cements soil/sediment particles, or a dispersed coating on mineral grains, between two or more electrodes. Following treatment, the iron band can simply be excavated as a coherent mass, or left *in situ* to provide a long-term inert, and, via reapplication of current, resealable barrier.

The method of this invention provides an in-situ, sustainable, cost-effective electrokinetic technology for groundwater protection and soil remediation, which can be operated in combination with, or as an alternative to, existing land remediation technologies. The technique is applicable to small sites, as well as larger areas of contaminated land, and can be implemented in ground where man-made structures are present, or where there is on-going site activity.

The method of this invention will now be illustrated by the following examples and the accompanying drawings:-

Figure 1 shows a sub-vertical, 1cm thick Fe-rich band generated in water-saturated sands after 30 hours application of a 1.5V potential difference between cast iron electrodes.

Figure 2a shows the generation of an Fe band in clay soil medium using the method of the present invention.

Figure 2b shows a diatom (marine microorganism) which, together with the underlying silt particle, has been coated and cemented by iron using the technology outlined in this application.

Figures 3a – d relate to data from a hydrocarbon purging experiment, using spiked Southampton Water mud. Figure 3a shows mid IR spectrum for original engine oil used for spiking the sediment. Figures 3b, c and d show FT-IR spectra for effluent drained from the cathode

compartment on days 5, 12 and 13 respectively of the experiment. Note the hydrocarbon and seawater absorption lines are marked. Note also the number of FT-IR active diesel lines, and their overall intensity, increases with experimental time (e.g. day 13 CH₃ bend at 1376.66 cm⁻¹, appears).

- 5 This indicates that the diesel within the cathode zone effluent became increasingly concentrated with experimental time.

Figures 4a and b show ⁶⁰Co and As data for treated Ravensglass estuary mud. Fe band is located 5cm from the anode. Note change in y-axis units, with ⁶⁰Co in Bq/g (or atomic disintegrations per second per gram) and As in ppm. Error bars on As data are smaller than the diamond marker symbol used. Note ca. ~40 % reduction of As in cathodic compartment, and ~100 % enrichment in narrow iron band. Reduction in ⁶⁰Co is less notable, but still exceeds 30 % in the anode zone (compared to the untreated material). A ~50 % enrichment in the iron band compared to
10 untreated material (which corresponds to a ~110 % enrichment in ⁶⁰Co over the anode zone) is also observed.
15

Examples

Pilot studies have been applied at laboratory scales in
20 25 x 2 x 15cm and 30 x 50 x 40cm open topped perspex cells (i.e. effectively in two dimensional and three dimensional space). All experiments have been run at <5 volts, using sacrificial cast iron electrodes. Electrodes were fabricated from 25mm diameter cast iron rods (Grade 250), composition: C 3.48%, Si 2.87%, Mn 0.812%, S 0.099%, P
25 0.364%, Fe REM. Experiments have been run on a variety of contaminated muds, with groundwater and seawater. interstitial pore waters, under unsaturated and saturated conditions. Time scales range from 3 to 400 hours.

In experiments using sand, the initial permeability of the
30 sands was 0.48 x 10⁻⁵ m/s, post -treatment permeability (in the iron band) was recorded at 0.19 x 10⁻⁵ m/s. For the mud experiments, initial

permeability was typically $\sim 0.29 \times 10^{-7}$, whereas treated material permeability (in the iron band) was recorded at 10^{-9} , or less, i.e. practically impervious. In addition, clear dewatering was consistently observed in the sediment around the anode, and rewatering around the cathode.

5 In every case, a strongly acidic zone was generated around the anode (approx. pH 2), and an alkaline zone around the cathode (approx. pH 13). At the point of abrupt pH change, approximately equidistant between cathode and anode, a 1-4cm thick, coherent, iron stone was precipitated (Figure 1) having an approximate uniaxial
10 compressive strength comparable to a moderately lithified sandstone (or the strongest Chalks in southern England). The iron stone generated consists of an amorphous iron band (see Figure 2a), or, in sandy sediments, a coating of zero valent iron and iron oxides which cement mineral grains. The presence of zero valent iron in the Fe-rich band is
15 noteworthy since a large proportion of permeable reactive barriers employed at contaminated sites are based on the use of zero-valent iron to act as a powerful chemical reductant for chlorinated aliphatic compounds dissolved in groundwater (Younger, 2002). It is also possible to rapidly generate a dispersed sorptive coating of iron on a pre-defined area of soil
20 without significant loss of porosity, simply by switching off the current before the Fe-band fully develops (Figure 2b). Such an approach may be desirable in situations where the sorptive properties of iron can be harnessed to reduce the concentration of specific contaminants, such as arsenic (As), in groundwater.

25 Two specific studies are now presented which illustrate the applicability and potential of the method of the present invention for containing leachate and dissolved phase contaminants and remediating contaminated land.

1. Hydrocarbon and heavy metal contaminated sediments,
30 Southampton Water
- A) An estuarine mud sample, contaminated with copper (Cu)

and petroleum hydrocarbons from the nearby Fawley oil refinery and from discharges from local shipping, was treated using a voltage of 2 V, in a three-dimensional cell using a rectangular electrode array. A continuous iron band of up to 3 cm thickness was generated from the electrode point sources. Data for pre- and post-treatment Cu concentration indicate that the electrokinetic treatment resulted in an approximate reduction of 61 % in Cu contamination in the anode zone in 16.3 days (note that a small proportion of Cu is natural background Cu held within the crystal lattice of stable minerals. This naturally occurring Cu is not influenced by the electrokinetic process). Notably, liquid hydrocarbon-rich effluent was expelled from the sediment (via electro-osmotic purging) and channeled and drained at approximately 10 ml per day from the surface of the cathodic compartment. The energy requirement for the experiment was 10.9 kW/m³. These values compare favourably against commonly cited energy requirements for other electrokinetic remediation systems, e.g. 500 kW/m³ for 100 % removal of metal contaminants (Virkutyte *et al.*, 2002). The timescale for copper decontamination and hydrocarbon purging from the sediment is comparable in duration to existing technologies which employ comparatively expensive cation-selective membranes (Van Cauwenberghe, 1997). The use of cast iron electrodes (as opposed to gold coated, platinum or graphite electrodes), means that the experimental system is low cost in terms of energy, materials and electrode construction, which typically make up ~70 % of the costs associated with any electrokinetic remediation system (Ho *et al.*, 1997).

B) To examine hydrocarbon decontamination by the method of the present invention, a sample of seawater saturated Solent mud was spiked with 0.4 litre of fresh 15W/40 (Halfords) engine oil, and treated at 2V for 13 days. Small volumes of clean seawater were added around the anode electrodes to prevent desiccation of the sediment. Effluent was removed intermittently by pipette from a 1cm deep trench dug in the cathode compartment. The effluent samples were analysed via Fourier

Transform mid-infrared (FT-IR) spectroscopy. The resultant FT-IR spectra clearly show the hydrocarbon-rich nature of the effluent (i.e. the output solution) compared to the clean seawater added (i.e. the input solution). Essentially, the hydrocarbons (in this case engine oil) contained in the clay-rich sediment are extruded or purged via an electro-osmotic flow of water from the anode to the cathode, and replaced by clean seawater (Figure 3a – d).

The natural moisture content of the untreated sedimented was 97%, compared to 69% and 88% for the anode and cathode zones respectively, consistent with the extraction of purged hydrocarbon-rich effluent from the cathode zone, and electro-osmotic flow of water from the anode to cathode zone. The bulk density of the cathode zone was recorded at 1.47 Mg/m³ (wet), 0.78Mg/m³ (dry), specific gravity 2.59. Anode zone bulk density was recorded at 1.49/m³ (wet), and 0.88 Mg/m³ (dry), specific gravity 2.62. These differences in physical properties between the anodic and cathodic zone are consistent with the addition of iron to anodic zone sediment, during the experiment. The hand Vane shear strength of the anode sediments is 2.45 K Pa , compared to zero for cathode zone and untreated sediment. This indicates a significant improvement in the engineering properties of the anode zone sediments as a consequence of electro-osmotic dewatering, accompanied by precipitation.

2. Radioactively-contaminated sediment, Ravenglass, Cumbria

A clay-rich sediment sample, slightly contaminated with artificial radionuclides, was collected from the Ravenglass estuary, Cumbria and treated at 1.5 V for 410 hours in a two-dimensional perspex cell, using an electrode separation of 17 cm. A 17 mm thick Fe-rich band was generated 5 cm from the anode, at the point where a major step in pH (from pH 2 to pH 13) occurred. Geochemical and radiometric analysis of the treated sediment (see Figure 4) shows clear removal of radioactive cobalt (⁶⁰Co) from the anode zone of the cell, and precipitation of the remobilised ⁶⁰Co on the iron-rich band. This was achieved in a short 17

day timescale compared with commercial systems which typically operate over durations of 20 -100 days.

Manganese (Mn), calcium (Ca) and strontium (Sr) were also remobilised from the anode zone and precipitated on, or around, the iron band. Soluble ions such as iodine (I), bromine (Br) and sodium (Na) migrated towards the appropriately charged electrode. Notably, As, present as a trace contaminant in these sediments, was highly amenable to the treatment, with desorption occurring at high pHs in the cathode zone. A 100 % enrichment of As occurred on the iron-rich band (see Figure 4), reflecting the strong affinity of As for the amorphous precipitated Fe. The highly particle-reactive radionuclides plutonium (Pu) and americium (Am), present at elevated activities in this sediment, were not significantly remobilised over the timescales used. The method of the present invention, however, can still be used to contain leachates contaminated with these radionuclides due to the action of the Fe band as a barrier to groundwater flow, the strong association of Pu and Am with freshly precipitated amorphous iron oxide phases, and the action of the applied electric field, which forces ionic and colloidal species to migrate towards the appropriately charged electrode.

In summary, unlike existing electrokinetic techniques which actively avoid precipitation of minerals and salts in the soil mass between the two electrodes, the method of the present invention is specifically geared towards producing an iron-rich band in situ between cathode and anode. This iron band simultaneously provides a physical as well as a chemical barrier to leachate migration. The method also employs a low voltage (with low energy requirements) to generate a strong pH gradient within soils and sediments and can desorb a range of polar and ionic contaminants. It uses low cost, sacrificial cathode and anode materials, and can produce, through differential dewatering, water movement and electro-osmotic purging of non-polar organic contaminants.

REFERENCES

1. Acar Y.B, Alshawabkeh A.N (1993) Environmental Science and Technology **27**, (13) 2638-2647.
- 5 2. Bendell-Young L, Harvey H.H (1992) Geochim.Cosmochim.Acta **56**, 1175-1186.
3. Cundy A.B. and Croudace I.W. (1995) Journal of Environmental
10 Radioactivity **29**, 191-211.
4. Haran B.S., Popor B.N, Zheng G, White R.E., (1996), Environ Prog
15 15 (3), 166 – 172.
5. Ho S.V, Athmer C.H, Sheridan P.W, Shapiro A.P. (1997) Journal of
Hazardous Material **55**, 39-60.
6. Ho S.V, Athmer C.H, Sheridan PW, Hughes BM, Orth R. McKenzie
D, Brodsky P.H, Shapiro A.P, Thornton R, Salvo J, Schultz D, Landis
20 R, Griffith R, Shoemaker S, (1999) Environmental Science and
Technology, **33**, 1086-1091.
7. Hopkinson L, Roberts S, Herrington R, Wilkinson J (1998) Geology
25 **26**, 347-350.
8. Jacob K-H, Dietrich S, Krug H-J (1996) Self organised mineral fabrics.
In: Kruhl J.H, Fractals and dynamic systems in geoscience. Springer
Verlag, Berlin, 259-268.
- 30 9. Kovalick W.W. (1995) In situ remediation technology: electro-kinetics.
U.S. Environmental Protection Agency, Office of Solid Waste and

Emergency Response Technology Innovation Office, Washington,
EPA542-K-94-007.

- 5 10. Lageman R (1993) Environmental Science and Technology, **27** (13)
2648-2650.
11. Lamont-Black J (2001) Ground Engineering **34**, 22-23.
- 10 12. Van Cauwenberghe (1997) Electrokinetics: Technology overview
report. Groundwater Remediation Technologies Analysis Centre, 1-
17.
13. Virkutyte J, Sillanpaa M, Latostenmaa P (2002) The Science of the
Total Environment **289**, 97-121.
- 15 14. Younger P. (2202), CL:AIRE view, Autumn 2002.

CLAIMS

1. An electrokinetic method for groundwater protection, soil remediation and engineering which comprises applying an electric field
5 across an area of soil, sediment or slurry so as to generate a pH and Eh gradient and thereby promote the *in situ* precipitation of a stable iron-rich band.
2. A method as claimed in claim 1, wherein the pH gradient is from pH2 to pH13.
- 10 3. A method as claimed in claim 1 or claim 2, wherein the current is applied between one or more pairs of electrodes inserted in the area of soil, sediment or slurry.
4. A method as claimed in claim 3, wherein the electrodes are made of cast iron, scrap iron, stainless steel or other iron-rich material.
- 15 5. A method as claimed in claim 3 or claim 4, wherein the voltage employed is less than 0.5 volts per cm of the distance between a pair of electrodes.
6. A method as claimed in any one of the preceding claims, wherein the soil, sediment or slurry contains organic, inorganic and/or
20 radioactive contaminants.
7. A method as claimed in any one of the preceding claims, wherein the iron-rich band acts as a physical and/or chemical barrier to contaminants present in the soil, sediment or slurry.
8. A method as claimed in any one of the preceding claims,
25 where iron is precipitated to form an impermeable coherent band, or a coating which cements soil/sediment particles, or a dispersed coating on mineral grains, between two or more electrodes.
9. A method as claimed in any one of the preceding claims, wherein the generation of the pH / Eh gradient mobilises, remobilises
30 and/or traps contaminants present in the soil, sediment or slurry.
10. A method as claimed in any one of the preceding claims,

- 18 -

which is performed for the purpose of the stabilisation and/or strategic dewatering/rewatering of soils, sediment and/or slurries, the improvement of the physical properties of soils and sediments for engineering purposes, the forced and directed migration of contaminated leachates, and/or

5 electro-osmotic purging of non-polar contaminants.

10/528629

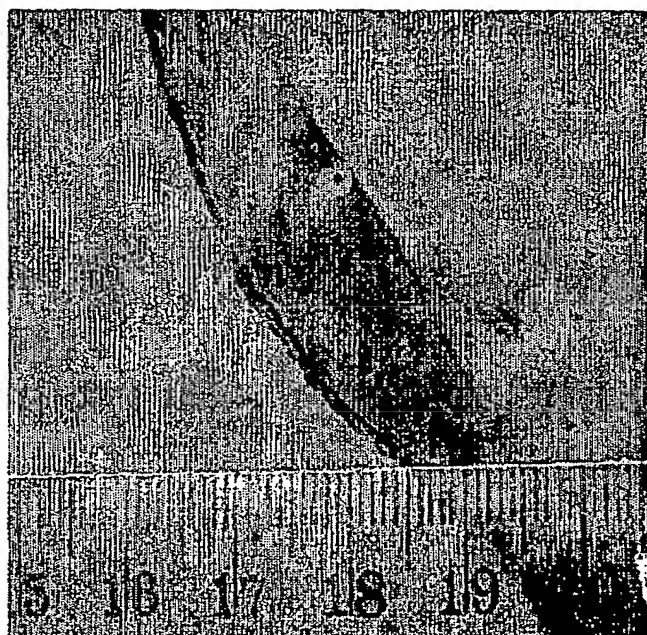


Fig. 1

10/528629

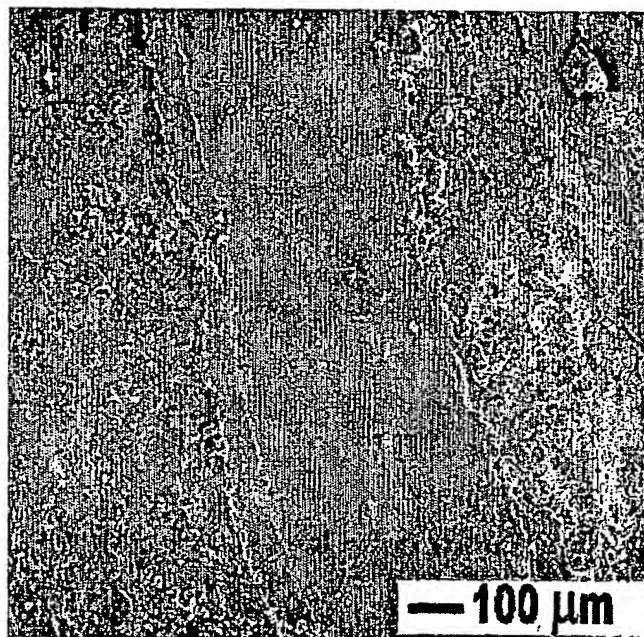


Fig. 2a

10/528629


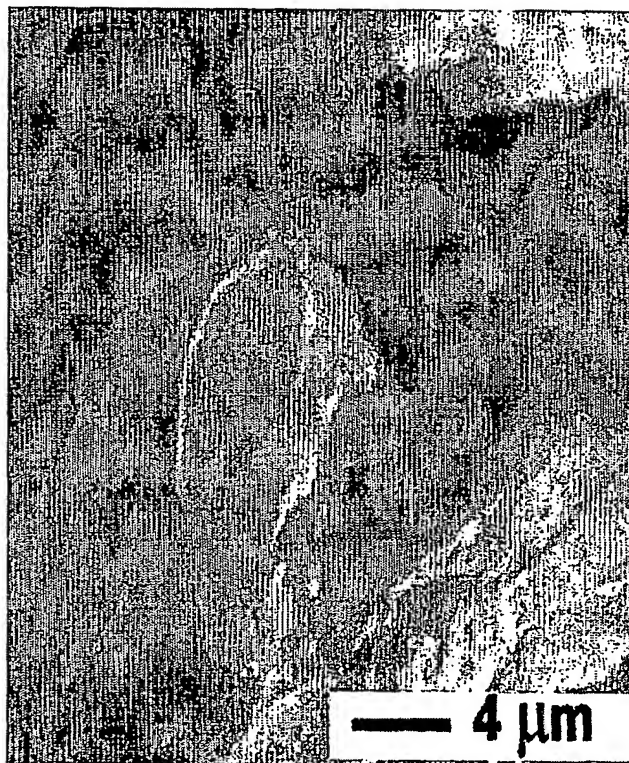


Fig. 2b

Fig. 3a

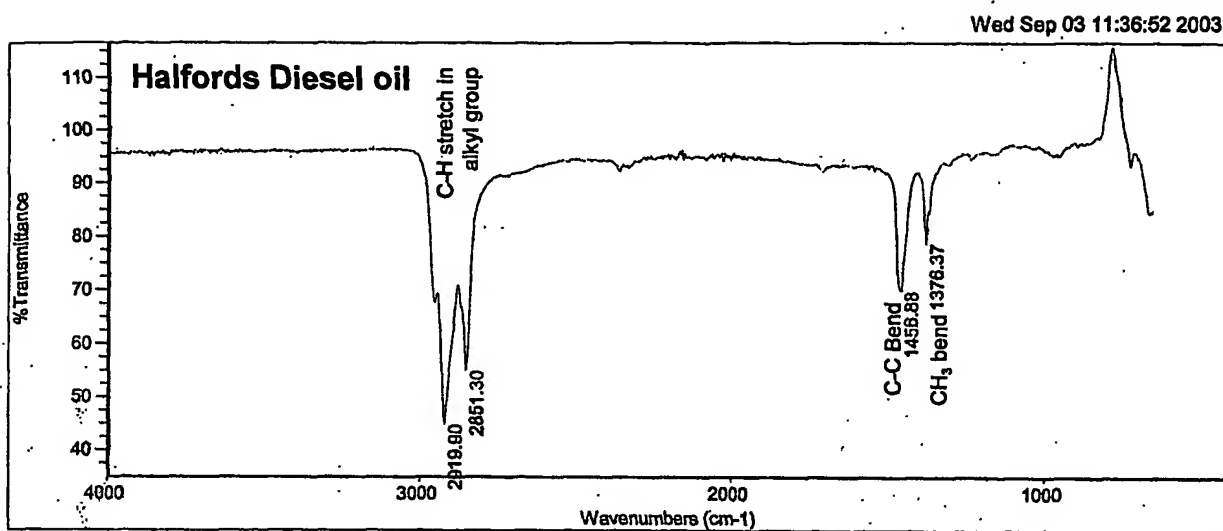

10/528629

Figure 3(b): Day 5 cathode zone effluent

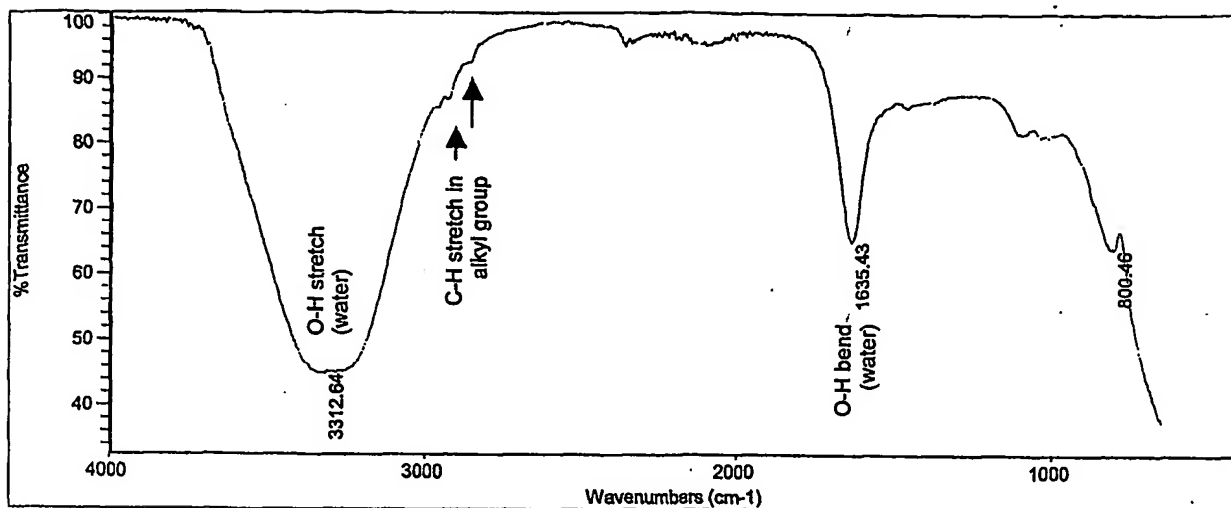


Figure 3(c) Day 12 cathode zone effluent


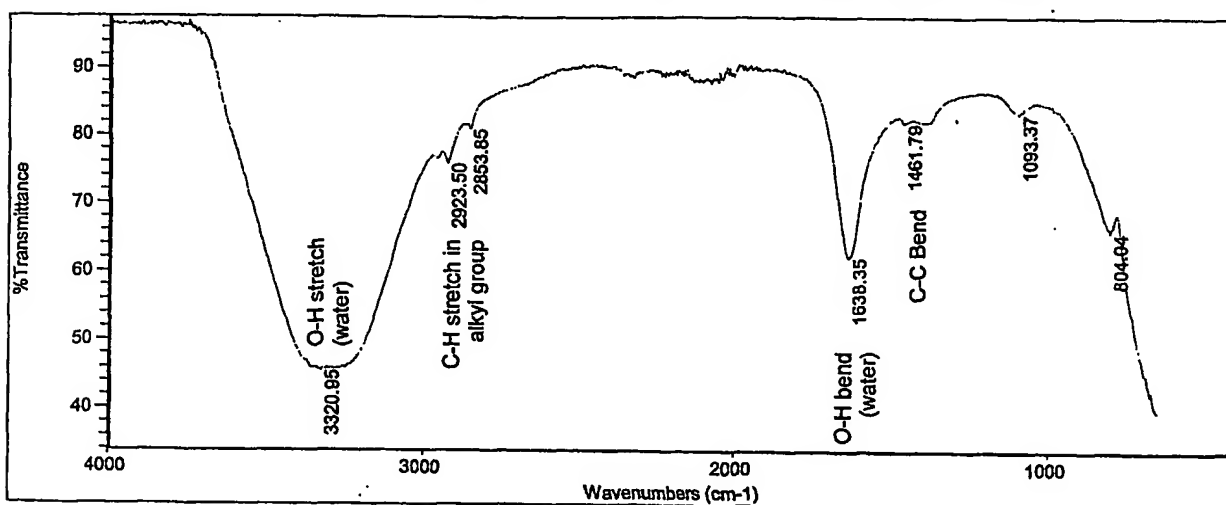


Figure 3(d) Day 13 cathode zone effluent

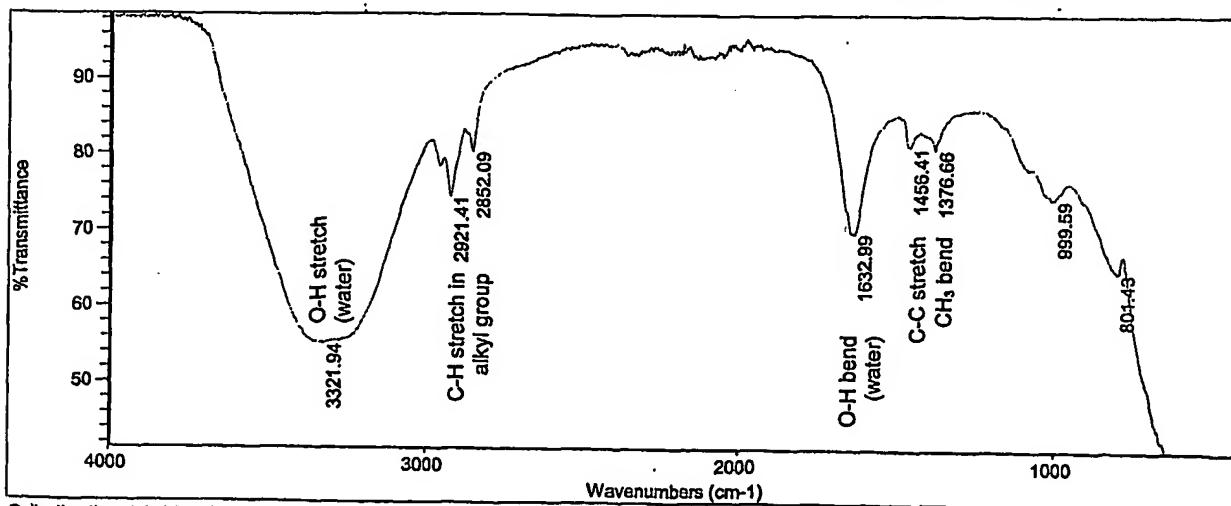

Collection time: Wed Sep 03 12:07:13 2003

Wed Sep 03 12:07:48 2003

Co-60 - radionuclide harvesting stage 1

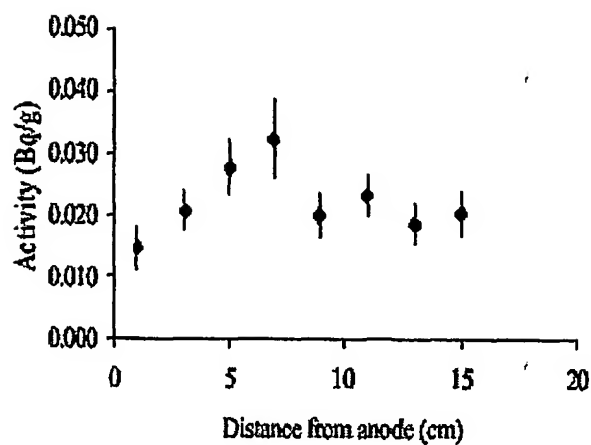


Fig. 4a

As - radionuclide harvesting stage 1

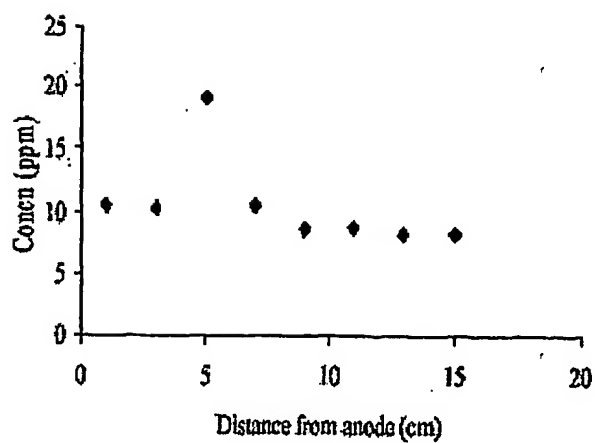


Fig. 4b

INTERNATIONAL SEARCH REPORT

Intern Application No

PCT/GB 03/04181

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 B09C1/08 C09K17/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 B09C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 97/28294 A (ELECTROCHEMICAL DESIGN ASSOCIA) 7 August 1997 (1997-08-07) page 3, line 31 - page 5, line 5 page 6, line 1 - line 7 page 8, line 27 - page 9, line 9 page 9, line 32 - page 10, line 34; claims 1,2	1-10
Y	US 6 221 237 B1 (LINDGREN ERIC R ET AL) 24 April 2001 (2001-04-24) column 3, line 49 - column 4, line 35	1,3,5,6, 9,10
Y	WO 91/01392 A (IONEX ; GRAVES RICHARD (US); LOMASNEY HENRY L (US)) 7 February 1991 (1991-02-07) page 17, line 22 - page 18, line 29 claims 1-5,15,16	1,3,5,6, 9,10
	----- -/-	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

12 January 2004

Date of mailing of the international search report

20/01/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Boulon, A

INTERNATIONAL SEARCH REPORT

Enter

Application No

PCT/GB 03/04181

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	ACAR Y B ET AL: "FUNDAMENTALS OF EXTRACTING SPECIES FROM SOILS BY ELECTROKINETICS" WASTE MANAGEMENT, ELSEVIER, NEW YORK, NY, US, vol. 13, no. 2, 1993, pages 141-151, XP000226759 ISSN: 0956-053X the whole document -----	1-10

INTERNATIONAL SEARCH REPORT

Inten

Application No

PCT/GB 03/04181

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 9728294	A	07-08-1997	WO 9728294 A1	07-08-1997
			US 5861090 A	19-01-1999
US 6221237	B1	24-04-2001	NONE	
WO 9101392	A	07-02-1991	AU 6425190 A	22-02-1991
			CA 2064224 A1	22-01-1991
			EP 0483286 A1	06-05-1992
			US 5405509 A	11-04-1995
			WO 9101392 A1	07-02-1991
			US 5489370 A	06-02-1996
			US 5262024 A	16-11-1993